


## Case Study Amazon VNA Solution

Engineers at Amazon fulfilment centres must maintain Very Narrow Aisle ( VNA ) racking used for pallet storage.

Awkward and restricted access areas present additional hazards when working at height, and maintenance tasks must routinely be performed where access is challenging.

Management at Amazon places the highest importance on providing fit for purpose, work at height safety equipment, on which staff have been professionally trained to assemble, inspect, and use safely.

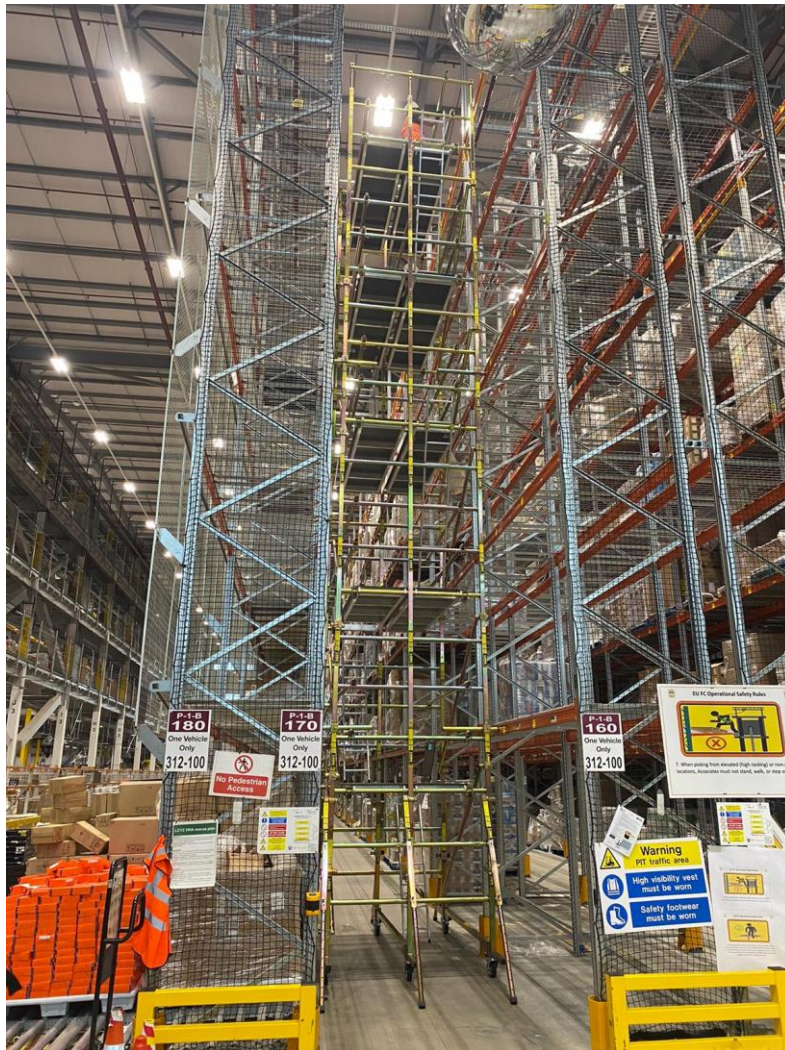

Areas where typically standard working at height equipment cannot fit.

LOBO is used to repair Amazon fulfilment centre racking. This is much more cost-effective than using scaffolders, and a cantilever configuration is possible. In this case, the VNA racking rear supports need repairing.

LOBO can be deployed every day, readjusted & reconfigured to suit.

[www.lobosystems.com](http://www.lobosystems.com)

### Conformities


EU: BS EN1004:2004 BS 1139 parts 3 & 4,

USA: Complies to OSHA CFR 29 1926 450-454 & sub part L & codified under 29 CFR 1910.27(a).


Canada: CSA Z797-09 and 269.2 (M87 and -16)

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

Lifting Slider Beam

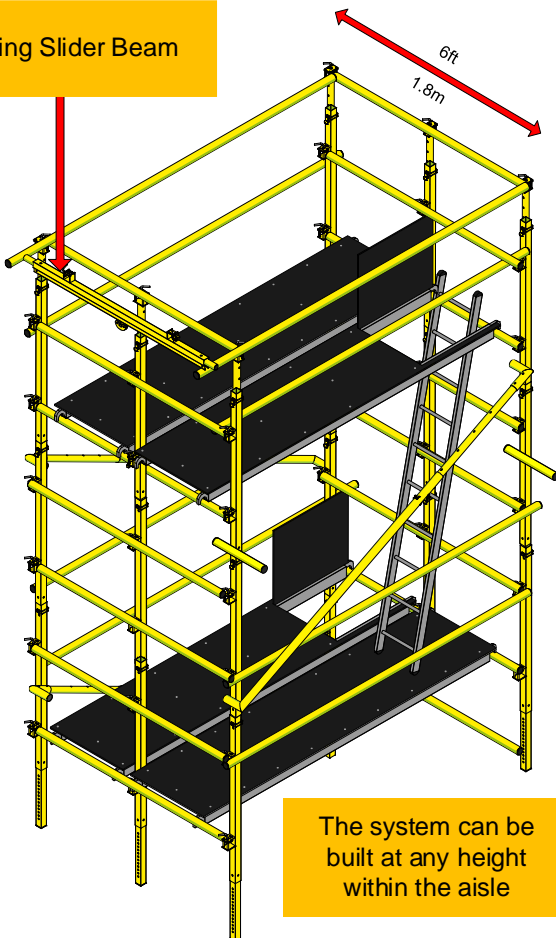

Cantilever can be used on both sides

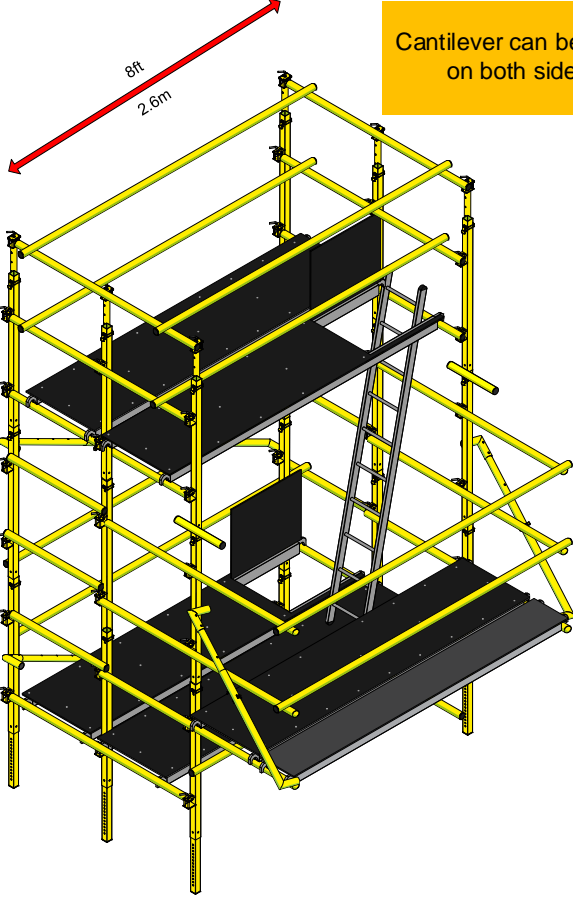

The system can be built at any height within the aisle



Certified training is a crucial component to the safe use and successful implementation of a LOBO System. Our trainers provide instruction on the secure assembly and inspection requirements.

Access equipment that is unstable or rickety or does not fit properly and is therefore dangerous is not allowed on site.

Giving engineers the best product to do the job also helps Amazon retain staff and reduce costs.

[www.lobosystems.com](http://www.lobosystems.com)


**Conformities**

- EU: BS EN1004:2004 BS 1139 parts 3 & 4,
- USA: Complies to OSHA CFR 29 1926 450-454 & sub part L & codified under 29 CFR 1910.27(a).
- Canada: CSA Z797-09 and 269.2 (M87 and -16)
- Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower



## The LOBO Advanced Platform is the solution

The LOBO System is a versatile work platform product that combines the flexibility and strength of traditional scaffolding with the simplicity and mobility of tower systems. When combined with the tube, the unique and patented hand-adjustable clamp allows the technician to create a work platform, of any shape or size, without the need for any tools.

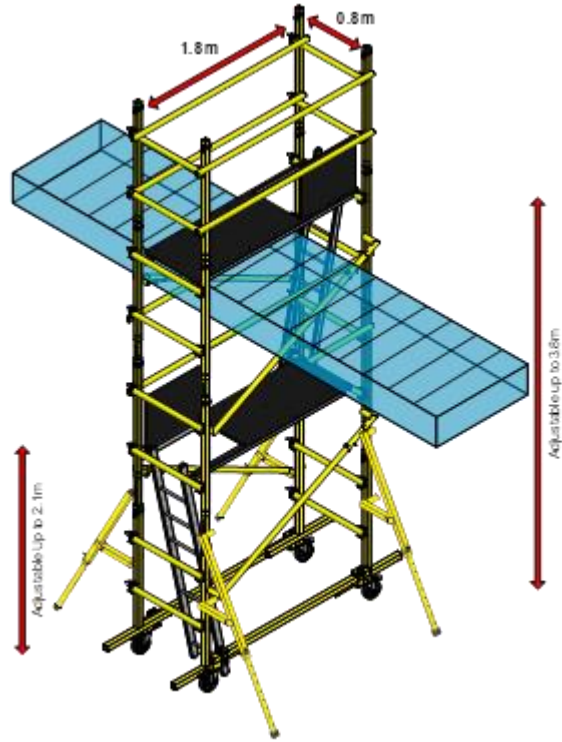

The system is made from modular steel components, which are easy and quick to assemble and provide a rock steady and safe working platform. In addition, it flat packs for transportation and yet is incredibly strong.

Areas previously awkward to get to can now be accessed by your engineers or technicians with ease whenever required.

[www.lobosystems.com](http://www.lobosystems.com)

### Conformities

EU: BS EN1004:2004 BS 1139 parts 3 & 4,

USA: Complies to OSHA CFR 29 1926 450-454 & sub part L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-09 and 269.2 (M87 and -16)

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

The LOBO System comprises of trestle legs that vary in size and adjustable extensions with fixed side clamps. Steel tubes can then be passed through the clamps, which are hand tightened to form a structure to suit the application.


Sway braces, toe boards, wheels, guardrails, outriggers, and a lifting slider beam can enhance the construction.

The LOBO System is scalable, adaptable, and adjustable to meet your ongoing and changing requirements.

Add more components or alter your existing configuration to satisfy the demands of the next task.

Protect your initial investment with a product that will meet all your access needs safely.

Explicitly designed for LOBO's advanced work platform system, it is fitted with feet for easy pallet truck or forklift manoeuvrability. Also, it can be locked with a padlock for security or storage.

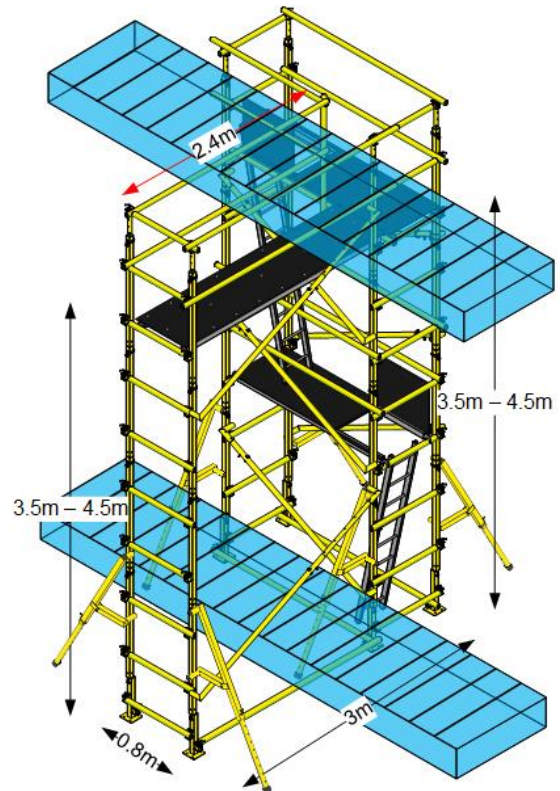

The LOBO Towerstore offers security on or off-site, and it provides a secure and yet simple way to store your LOBO components.

The Towerstore can be vertically or horizontally mounted to suit the workshop and transported for rapid deployment, on and off-site.

The LOBO System can be transported and assembled fast and easily from a flat pack, into any required configuration, by your maintenance engineers and technicians.

Options include Lifting Slider beams which can be fitted to the system. And it can be stored in a LOBO Towerstore unit when not in use.

LOBO is a rigid and stable product, which meets or exceeds international safety regulations.

[www.lobosystems.com](http://www.lobosystems.com)

**Conformities**

EU: BS EN1004:2004 BS 1139 parts 3 & 4,

USA: Complies to OSHA CFR 29 1926 450-454 & sub part L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-09 and 269.2 (M87 and -16)

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

