

## Product Application – Lifting Slider Beam

LOBO Systems Ltd provides easy to attach lifting slider beams in a range of lengths.



The beams are fitted to standard LOBO components or integrated into a LOBO System with ease.

This is all done without the need for any tools and can be flat packed for transport or storage.

Quick to assemble, they can be used for many industrial applications to assist in the maintenance of pumps, gearboxes, motors and many other machines.

LOBO slider beams can be positioned within a LOBO structure to facilitate limitless applications.


Beams are rated and certified with a Safe Working Load (SWL) of 500Kg/1100 lbs maximum.



**Five lengths are available**

- 1.2m/4ft
- 1.8m/6ft
- 2.4m/8ft
- 3.0m/10ft
- 3.6m/12ft

**rated at 500Kg/1100 lbs.**

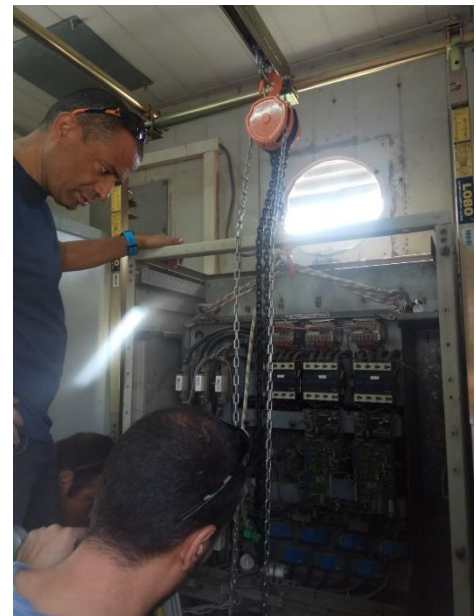

[www.lobosystems.com](http://www.lobosystems.com)

### Conformities

EU: BS EN1004:2004 BS 1139 parts 3 & 4,

USA: Complies to OSHA CFR 29 1926 450-454 & sub part L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-09 and 269.2 (M87 and -16)

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower