

Application – Awkward and Restricted Access

Awkward and restricted access areas present additional hazards when working at height. Construction, fabrication and maintenance tasks must routinely be performed inside congested plant rooms, under low ceilings and in tunnels where access is extremely difficult.


Further complications occur when access is required inside storage tanks, silos, vessels, drains, sewers and combustion chambers. Areas, where typically, standard working at height equipment cannot fit. Safety management begins with an organisation ensuring that employees have fit for purpose, work at height safety equipment, on which they have been trained to assemble, inspect and use safely.

Introducing the LOBO System



The LOBO System is a versatile work platform product that combines the flexibility and strength of traditional scaffolding with the simplicity and mobility of tower systems. The unique and patented hand-adjustable clamp, when combined with the tube, allows the technician to create a work platform, of any shape or size, without the need for any tools.

The system is made from modular steel components, which are easy and quick to assemble. It flat packs for transportation and yet is incredibly strong. Areas previously awkward to get to can now be accessed by your engineers or technicians whenever required.

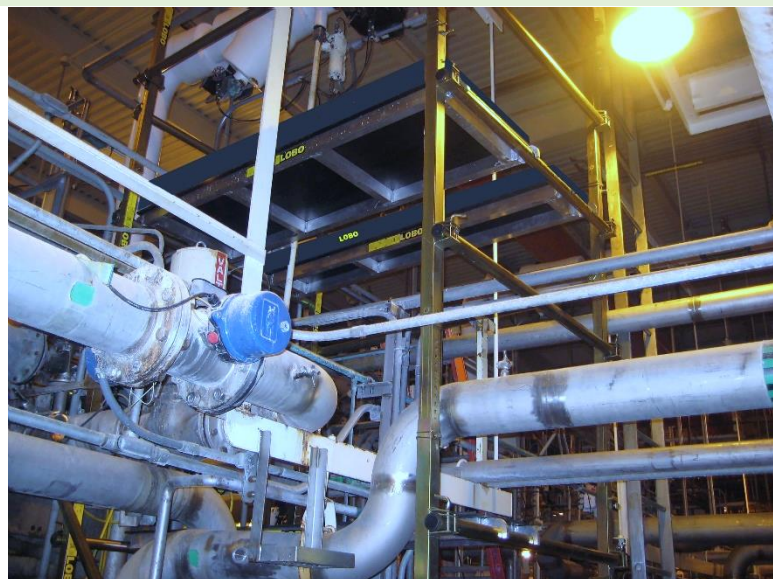

www.lobosystems.com

Conformities

EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)

USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-18 and 269.2 -M87

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

ISO 9001 : 2015
CERTIFIED 213858



The LOBO System comprises trestle legs that vary in size and adjustable extensions with fixed side clamps. Steel tubes can then be passed through the clamps, which are hand tightened to form a structure to suit the application. Sway braces, toe boards, wheels, guardrails, outriggers and a lifting slider beam can be added to enhance the construction.



The LOBO System can be transported to incidents and assembled fast and with ease from a flat pack, into any required configuration, by your engineers and technicians. Options include Lifting Slider beams which can be fitted to the system. And it can be stored in a LOBO Towerstore unit when not in use.

The LOBO System is scalable, adaptable and adjustable to meet your ongoing and changing requirements.

Simply add more components or alter your existing configuration to satisfy the demands of the next task. Protect your initial investment with a product that will meet all your access needs safely.

LOBO is a rigid and stable product, which meets or exceeds international safety regulations.

LOBO Systems provides fully certified training for safe assembly, inspection and use.

www.lobosystems.com

Conformities

EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)

USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-18 and 269.2 -M87

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

ISO 9001 : 2015
CERTIFIED 213858