

Application – Above Conveyor Maintenance

The Problem

Conveyors move materials and goods throughout plants and warehouses every day. Driven by a belt or chain, they move at various speeds and angles. A conveyor breakdown can often shut down the entire operation until repairs are complete. The cost impact of a conveyor failure is significant. However, following a comprehensive maintenance program and using the proper maintenance support equipment can prevent unexpected downtime.


Reaching equipment above the conveyor units also presents a working at height problem, and practical safety management begins with an organisation ensuring that employees have fit for purpose, work at height safety equipment to use, on which they have been trained to assemble, inspect and use correctly.

The Solution

The LOBO System is a versatile work platform product that combines the flexibility and



strength of traditional scaffolding with the simplicity and mobility of tower systems.

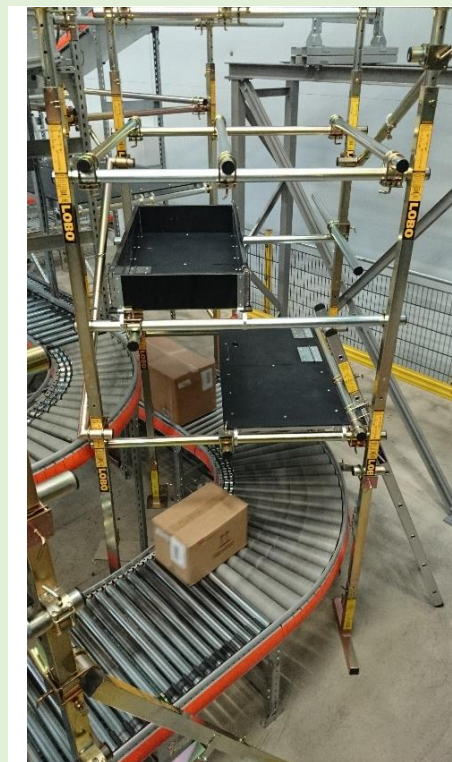

When combined with the tube, the unique and patented hand-adjustable clamp allows the technician or engineer to create a work platform, of any shape or size, without the need for any tools.

The system is made from modular steel components, which are easy and quick to assemble. It flat packs for transport and yet is incredibly strong.

Therefore, outsourced scaffolding costs can be substantially reduced, as your maintenance and production teams can assemble the system anywhere required.

Perfect for accessing awkward areas above and around the conveyor units.

www.lobosystems.com

Conformities

EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)

USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-18 and 269.2 -M87

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

ISO 9001 : 2015
CERTIFIED 213858

The Conclusion

The LOBO System comprises trestle legs that vary in size and adjustable extensions with fixed side clamps. Steel tubes can then be passed through the clamps, which are hand tightened to form a structure to suit the application. In addition, sway braces, toe boards, wheels, guardrails, outriggers and a lifting beam can be added to enhance the construction.



Product Benefits

The LOBO System is scalable, adaptable and adjustable to meet your ongoing and changing requirements. Add more components or alter your existing configuration to satisfy the demands of the next task.



Protect your initial investment with a product that will safely meet all your access needs!

LOBO is a rigid and stable product which meets or exceeds current safety regulations.

The LOBO System can be transported from the site and quickly assembled from a flat pack, into any required configuration, by your maintenance staff. In addition, it can be stored in a LOBO Towerstore unit when not in use.

LOBO Systems provides fully certified training for safe assembly, inspection and use.

www.lobosystems.com

Conformities
EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)
USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).
Canada: CSA Z797-18 and 269.2 -M87
Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

