


Fulfilment Distribution Centre Solution

Engineers at modern fulfilment centres must maintain material handling equipment, conveyors and packaging machinery to ensure their smooth running and full-time operation.

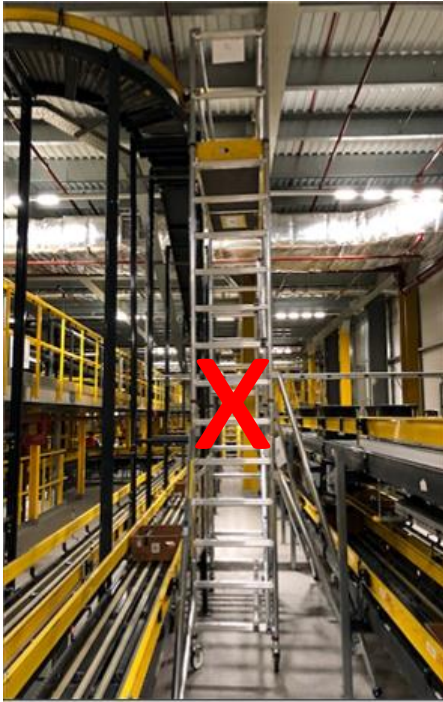

Awkward and restricted access areas present additional hazards when working at height, and maintenance tasks must routinely be performed where access is challenging.

Areas where typically, standard working at height equipment cannot fit.

Safety management begins with an organisation ensuring that employees have fit for purpose and work at height safety equipment, on which they have been trained to assemble, inspect and use safely.


Access equipment that is unstable or rickety, which does not fit properly and is therefore dangerous, should never be used.

The LOBO Advanced Platform is the solution

The LOBO System is a versatile work platform product that combines the flexibility and strength of traditional scaffolding with the simplicity and mobility of tower systems. When combined with the tube, the unique and patented hand-adjustable clamp allows the technician to create a work platform of any shape or size without needing any tools.

The system is made from modular steel components, which are easy and quick to assemble and provide a rock-solid and safe working platform. In addition, it flat packs for transportation and yet is incredibly strong. Areas previously awkward to access can now be accessed by your engineers or technicians quickly, whenever required.

The LOBO System comprises trestle legs that vary in size and adjustable extensions with fixed side clamps. Steel tubes can then be

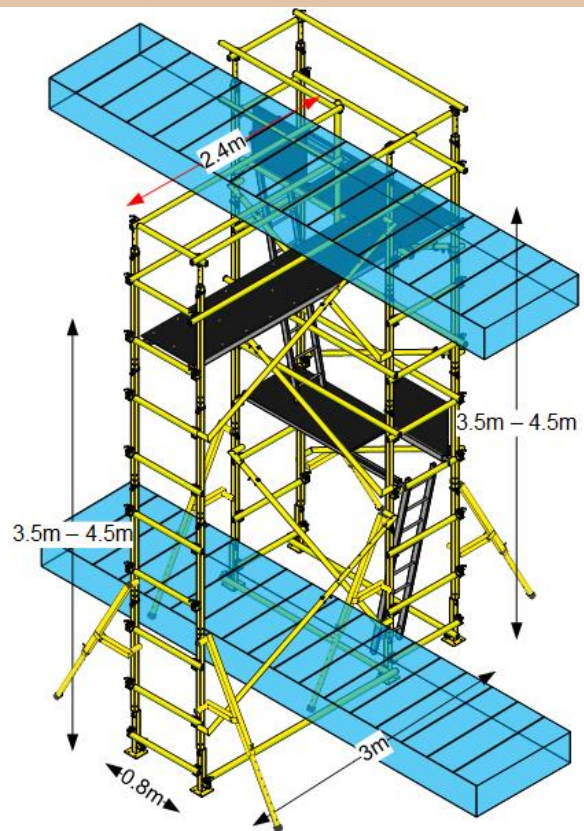

www.lobosystems.com

Conformities

EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)

USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).


Canada: CSA Z797-18 and 269.2 -M87

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

ISO 9001 : 2015
CERTIFIED 213858

passed through the clamps, which are hand tightened to form a structure to suit the application. In addition, sway braces, toe boards, wheels, guardrails, outriggers and a lifting slider beam can be added to enhance the construction.

The LOBO System is scalable, adaptable and adjustable to meet your ongoing and changing requirements. Add more components or alter your existing configuration to satisfy the demands of the next task. Protect your initial investment with a product that will safely meet all your access needs!

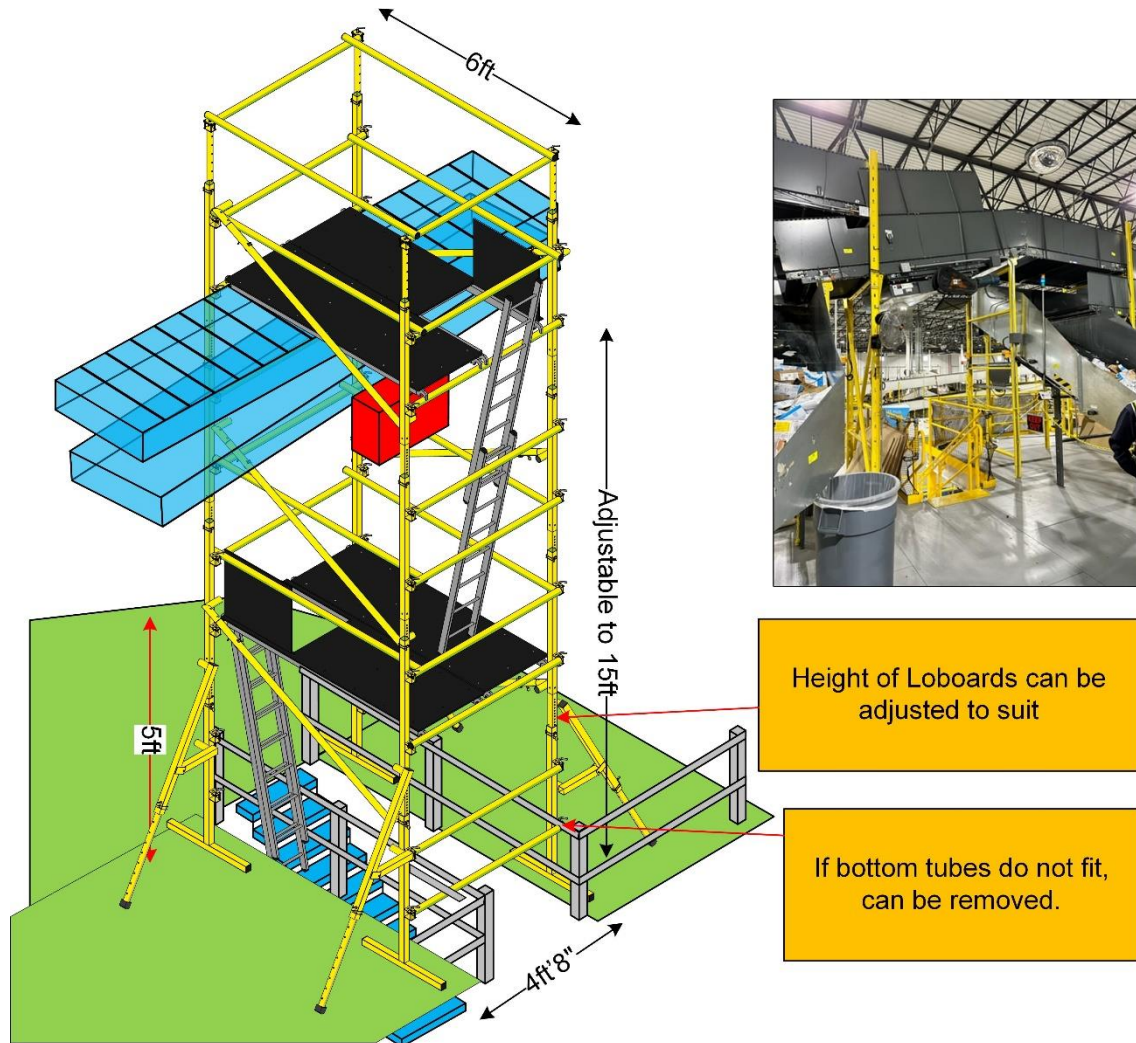

The LOBO System can be transported and assembled fast and easily from a flat pack, into any required configuration, by your maintenance engineers and technicians. Options include Lifting Slider beams which can be fitted to the system. And it can be stored in a LOBO Towerstore unit when not used.

LOBO is a rigid and stable product which meets or exceeds international safety regulations.

LOBO Systems provides fully certified training for safe assembly, inspection and use.

www.lobosystems.com

Conformities

EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)

USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-18 and 269.2 -M87

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

ISO 9001 : 2015
CERTIFIED 213858