

Product Application – Lifting Slider Beam

LOBO Systems Ltd provides easy-to-attach lifting slider beams in a range of lengths.



The beams are easily fitted to standard LOBO components or integrated into a LOBO System. This is all done without tools and can be flat-packed for transport or storage.

Quickly assembled, they can be used for many industrial applications to maintain pumps, gearboxes, motors, and other machines.

LOBO slider beams can be positioned within a LOBO structure to facilitate limitless applications.


Beams are rated and certified with a maximum Safe Working Load (SWL) of 500Kg/1100 lbs.



Five lengths are available

- 1.2m/4ft
- 1.8m/6ft
- 2.4m/8ft
- 3.0m/10ft
- 3.6m/12ft

rated at 500Kg/1100 lbs.

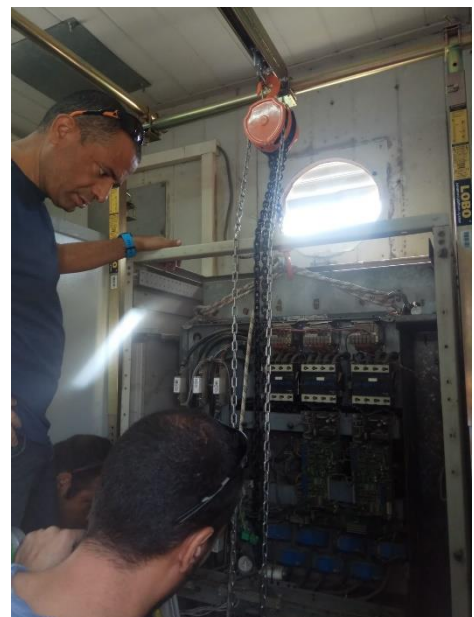

www.lobosystems.com

Conformities

EU: BS EN1004-1:2020 & EU: BS EN1004-2:2021 (BS 1139)

USA: OSHA CFR 29 1926 450-454 & subpart L & codified under 29 CFR 1910.27(a).

Canada: CSA Z797-18 and 269.2 -M87

Australia: AS/NZS 1576.1:2010 and AS/NZS 1576.3:2015 Tower

ISO 9001 : 2015
CERTIFIED 213858